




DO NOT OPEN
PACKAGE WITH
A KNIFE

YOU SHOULD HAVE



BRACKETS



SAFETY DEVICE



HOLD-DOWN BRACKET (x2)



VALANCE HOOK & CLIP




MATCHING & RETURN CLIPS



SCREWS REQUIRED

Please use the correct screw
types for your wall/surface



TOOLS REQUIRED

- Screwdriver
- Pencil
- Power-Drill
- Tape Measure

THE INSTALLATION HEIGHT OF THIS BLIND MUST NOT BE LESS THAN 1500MM
FROM THE FLOOR IF A CORD OR CHAIN IS USED TO OPERATE.

FITTING THE BOX BRACKETS


OUTSIDE RECESS

If the blind is to be fitted outside the window ensure that measurement C is the same. Follow instructions for FACE FIXING. To calculate $C = (A - B) / 2$.

INSIDE RECESS


TOP FIX to the lintel or FACE FIX brackets to the window frame.

← (A) Width of Blind →

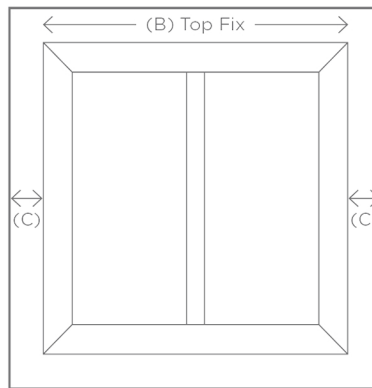


TOP FIXING

Measure & mark the distance between the wall & the back of the bracket, allowing for obstructions like handles that protrude into the recess area. The brackets should be positioned 6mm wider than the blind at each end. Hold each bracket into place and mark the hole positions. Fit each bracket using the screws provided. Please ensure fixings are suitable for the wall/surface to which you are mounting the brackets.

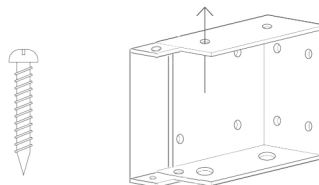


FACE FIXING

The brackets should be positioned 6mm wider than the blind at each end. Hold each bracket into place and mark the hole positions. Fit each bracket using the screws provided. Please ensure fixings are suitable for the wall/surface to which you are mounting the brackets.

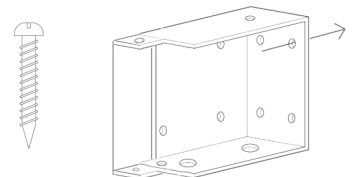


SIDE FIXING

Hold each bracket into place and mark the hole positions. Fit each bracket using the screws provided. Please ensure fixings are suitable for the wall/surface to which you are mounting the brackets.

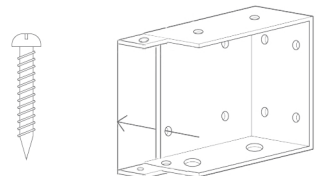

CENTRE SUPPORT BRACKET


For larger width blinds a centre support bracket is required. Align the top of the centre support bracket with the top of the mounting bracket before installation. Install with the bigger flap of the centre support bracket on the top equally spaced along the width of the headrail and clear of the slat ladder positions.

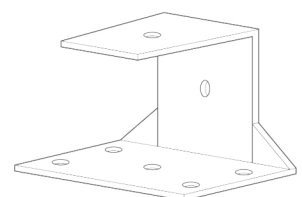


CHILDREN CAN STRANGLE IF A
SAFETY DEVICE IS NOT INSTALLED.
ALWAYS USE A SAFETY DEVICE TO
KEEP CORDS AND CHAINS OUT OF
REACH OF CHILDREN.

FITTING THE BLIND

Open the doors on the brackets and slide the blind into place with the controls and Velcro pads facing towards you.

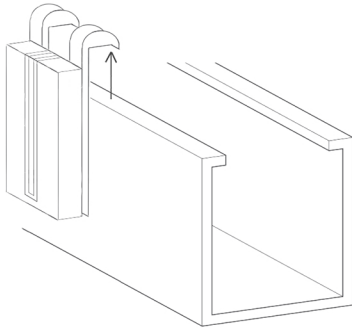

Push the bracket doors closed to secure the blind.

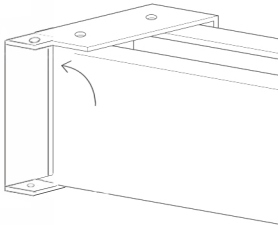

Fit the safety cleat to a wall adjacent to a blind. This safety device must be fitted in line with child safety legislation.


Number of ladders	End fix brackets	Centre support brackets (supplied)
2	2	0
3	2	1
4	2	1
5	2	2
6	2	3
7	2	3
8	2	4
9	2	4

HOLD DOWN BRACKET (OPTIONAL)


Hold down brackets using two small screws, screw hold down bracket to window facing or wall. Snap bracket pin ends into the hole at bottom rail end.

ATTACHING THE VALANCE


Fit the valance clips into the groove on the back of the valance at an equal distance apart along its length.

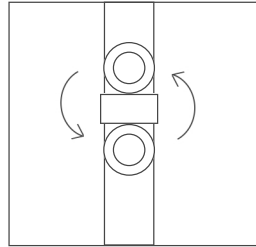

Line up the valance clips with the hooks on the blind. You can easily slide the hooks on the headrail to match the position of the hooks.

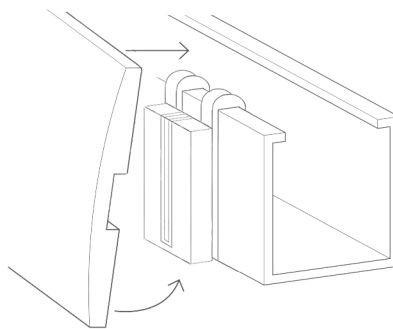


Push the valance into place.

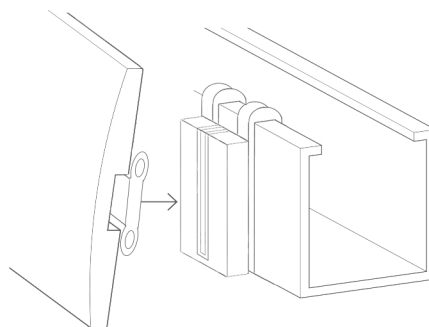


HOLD DOWN BRACKET (OPTIONAL)

If your blind has been supplied with valance returns slide the valance return clip onto the valance. Slot the other ends of the valance clip onto the valance return and align the edge.

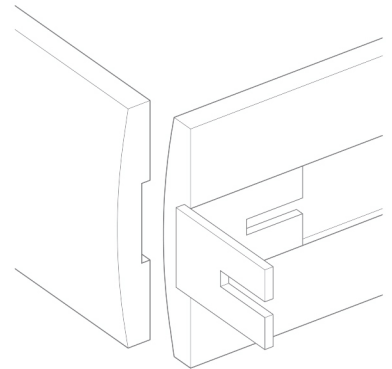

Using 2 small screws, screw the hold-down bracket to the edge of the window or side wall.

Insert bracket pin ends into the hole at the bottom rail end. A bradawl or drill may be needed to make holes in the bottom rail to insert the hold down bracket.

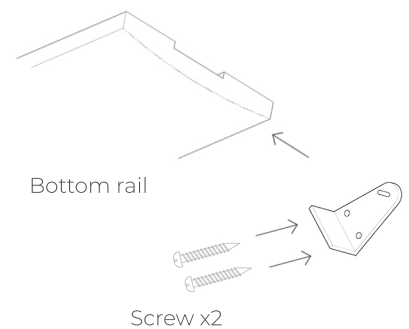

INSTALLING CHILD SAFETY DEVICE


The safety cleat shall be installed as close to the headrail as possible and in all cases not less than 1500mm from the floor. The cord must be fully accumulated around the safety cleat(s) when the blind is not in use.

Use the table below to determine the distance required between the cleats to fully accumulate the cords when the blind is fully raised.


Drop of Blind	*Distance between cord cleats (centre to centre)
1-1000mm	100mm
1001-2000mm	150mm
2001-3000mm	300mm

Place the safety cleat in the desired position on the wall and mark the positions of the holes with a pencil.

Note: Based on cord up to 2.8mm, 17m can be accumulated in total.

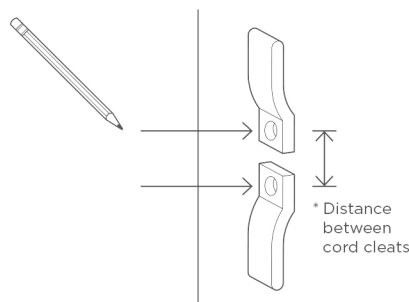


Use the screws provided to attach the safety cleat to the wall.

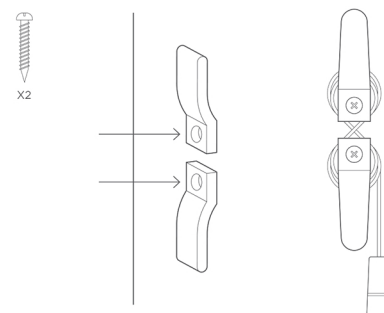

Wrap the cords around the cord cleats (see image above). When the cords are fully accumulated ensure they are secure so when any cord is pulled no excess cord is released.

BREAKAWAY CORD CONDENSER

Breakaway cord condenser is pre-fitted to the lift cords so that when a horizontal force is applied to the cords entering the condenser it safely breaks away eliminating any hazardous loops.

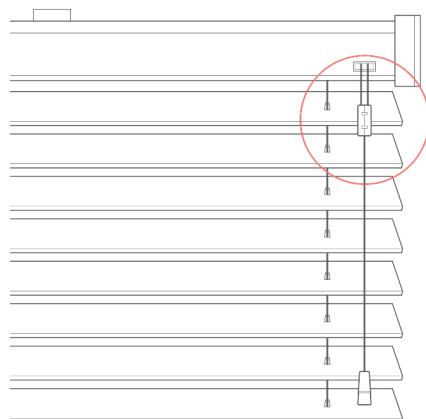

If the cord condenser is pulled apart:



Untangle and untwist cords.

For 2 cords: Press the cord condenser together until it is fully closed.

For 3 cords: Place the loose cord in the opening in one half of the cord condenser and press the cord condenser together until it is fully closed.


For 4 cords: Place one of the loose cords in the opening in one half of the cord condenser, the remaining loose cord in the opening in the other half and press the cord condenser together until it is fully closed.

If there are any doubts that the cord condenser has not been re-attached correctly it can be tested by placing your arm between the cords and pressing downwards. The condenser should break apart with minimal force, if it does not breakaway tie cords out of reach of children and contact a reputable blind company to repair the blind.

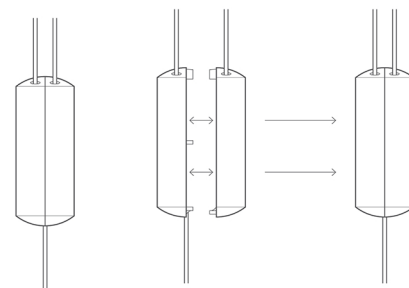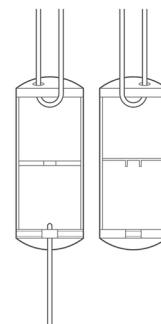

TILT OPERATION

To tilt blind: Pull on the required tilt cord tassel to tilt slats to the open/closed position.

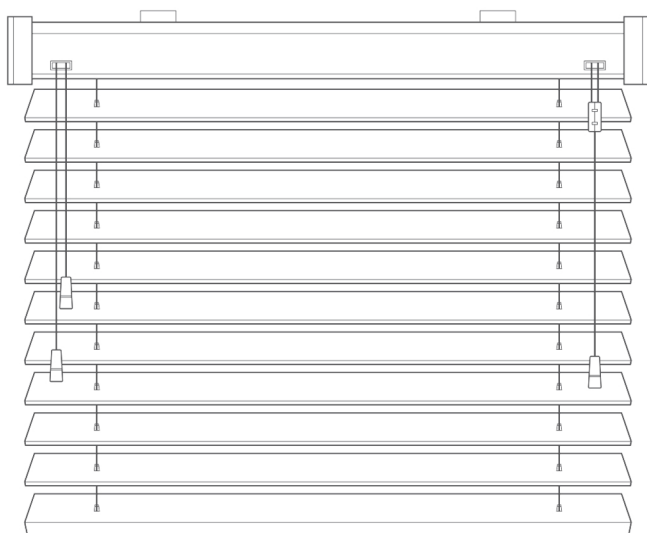

Tilt blind horizontal before raising/lowering to extend the life of the blind.

To lower blind: Move lift cord towards the middle of the blind pulling down gently until cord lock releases.

To raise blind: Pull lift cord downward until blind reaches desired height.

To lock cords: Pull lift cord towards the outside of the blind and release. The cord will lock automatically.

WARNING

Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product.
To avoid strangulation and entanglement, keep cords out of the reach of young children.

Cords may become wrapped around a child's neck.

Move beds, cots and furniture away from window covering cords.
Do not tie cords together. Make sure cords do not twist and create a loop.

MAINTENANCE

The product is maintenance free however we recommend that regular visual checks are completed to ensure that no components have been damaged, which could result in operating difficulties and/or cause a safety risk.

If any maintenance is required we recommend that the work is carried out immediately, by a reputable blind company.



**make it
safe**™

BBSA®
BRITISH BLIND & SHUTTER ASSOCIATION

